


ConceptPatio 68


Sliding Systems





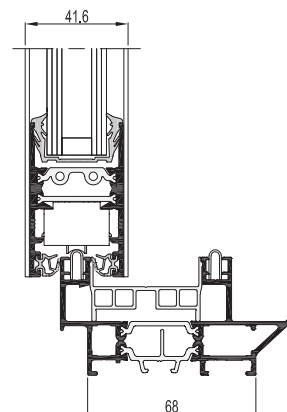

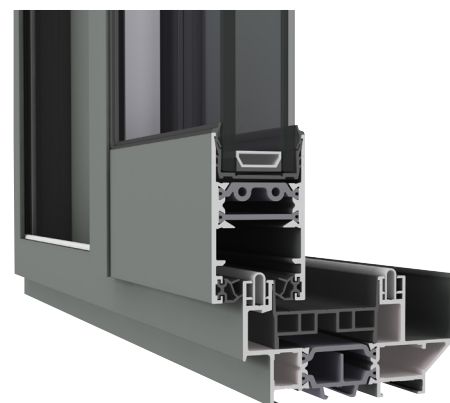

Elegance, comfort and security

The ConceptPatio 68 aluminium sliding system combines a unique style, great performances, and excellent security. Its slim sightlines ensure maximised daylight entrance, while open corner and pocket opening solutions offer uninterrupted views.

- Small sightlines for maximised daylight entrance
- Large variety of configurations, including open corner and pocket doors
- Ideal for renovation in moderate climates



PROPERTIES		MONORAIL	2-RAIL	3-RAIL
Visible width	Frame / Vent	109 mm	109 mm	109 mm
	Meeting section	34 mm	34 mm	34 mm
Overall system depth	Frame	85 mm	68 mm	124 mm
	Vent	41.6 mm	41.6 mm	41.6 mm
Maximal vent height			2800 mm	
Maximal vent weight			200 kg	
Rebate height			18 mm	
Glass thickness			28 - 36 mm	
Glazing method		with EPDM in accordance with the envelope principle		
Thermal insulation		32 mm and 36 mm fibreglass reinforced polyamide strips		

PERFORMANCES		
	Thermal insulation (Uw)	Down to 1.4 W/m²K
	Acoustic performance (Rw (C; Ctr))	38 (-2; -4) dB
	Air tightness	Up to 600 Pa (class 4)
	Wind load resistance	Up to 1600 Pa (class 4)
	Water tightness	Up to 300 Pa (class 7B)
	Burglar resistance	Up to RC 2 (EN 1627)

Performances and properties depend on size, profile combinations, hardware and infill choices.